


1. ALL TRUNCATED DOME DETECTABLE WARNING PLATE DESIGNS ARE TO BE FINALIZED BY THE PLATE MANUFACTURER, "BIBBY-STE-CROIX" OR APPROVED EQUIVALENT (610mmx610mm SQ.).
2. TRUNCATED DOME PLATES ARE TO BE PLACED 150mm OFFSET FROM BACK OF CURB (200mm MAX.) MINIMUM 150mm CONCRETE REQUIRED FROM OUTER EDGE OF PLATE ASSEMBLY TO EDGE OF SIDEWALK.
3. COLOUR OF TRUNCATED DOME PLATES TO BE NATURAL PATINA.
4. PLATES TO BE ALIGNED PARALLEL TO CURB. ON RADII, REAR CORNERS OF ADJACENT PLATES TO TOUCH.

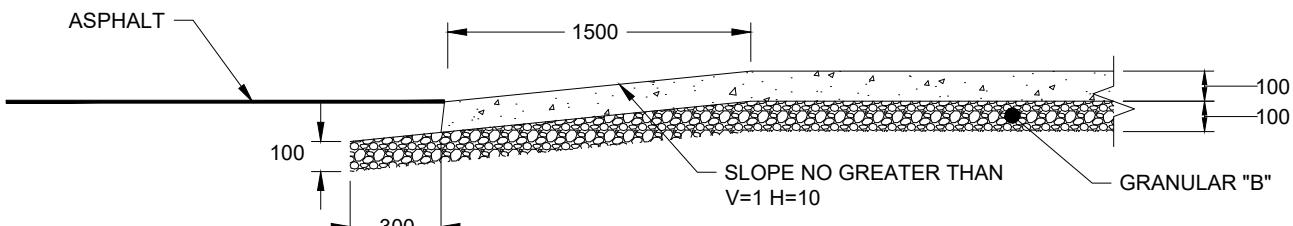

NOTES:

1. CONCRETE IS TO BE 32MPa TO MEET CSA A23.1/A23.2, CLASS C-2 EXPOSURE.
2. A NON-SKID RIBBED SURFACE SHALL BE EDGED ON RAMP. SCORE LINES MUST LINE UP IN THE DIRECTION OF TRAVEL AND BE PARALLEL WITH THE SIDEWALK. SCORE CONCRETE USING A 9.5mm TROWEL, MIN 6 SCORE LINES AT 150mm O.C.
3. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.

**MUNICIPAL MASTER
SPECIFICATIONS**

PARALLEL CURB RAMP

DRAWING NUMBER 04160

DATE: APRIL 2023
SCALE: N.T.S.